

⚡ Specifications

Nominal Voltage(V)

12V

Nominal Capacity

20 hour rate	(1.1A to 10.50V)	22Ah
10 hour rate	(2.09A to 10.50V)	20.9Ah
5 hour rate	(3.74A to 10.20V)	18.7Ah
1 C	(22A to 9.60V)	13.93Ah
3 C	(66A to 9.60V)	8.8Ah

Cold Cranking Amperes (-18°C)

200A

Cranking Amperes (25°C)

315A

Storage Capacity (RC,25A duration time)

32min

Weight

Approx. 7.05kg(15.51Lbs.)

Internal Resistance (at 1KHz)

Approx. 6.7 mΩ

Maximum Discharge Current for

5 seconds: 330A

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.4 to 15.0V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current :	6.6A
Standby use:	
Float Charging Voltage	13.5 to 13.8V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C(5°F)	to	40°C(104°F)
Discharge	-15°C(5°F)	to	50°C(122°F)
Storage	-15°C(5°F)	to	40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	97%
3 month	92%
6 month	85%

Case Material

ABS UL94 HB
Option: Flammability resistance of (UL94 V-0)

Design Life

EUROBAT(20°C): 3-5 YEARS STANDARD COMMERCIAL

Terminal

F6



⚡ Dimensions


Handle is optional

Length (L)	181 ± ^{0.08} _{0.04}
Width (W)	77 ± ^{0.08} _{0.04}
Height (H)	170 ± ^{0.08} _{0.04}
Overall Height (HT)	170 ± ^{0.08} _{0.04}


Description of torque value of hard ware for the terminals:

Recommended torque value
Maximum allowable torque value


M5: 4 N-m (41kgf-cm)
M5: 6 N-m (61kgf-cm)
mm(inch)

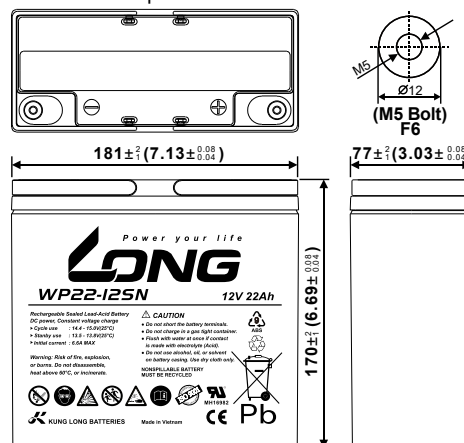


(V) Discharge Time VS. Discharge Current (25°C)

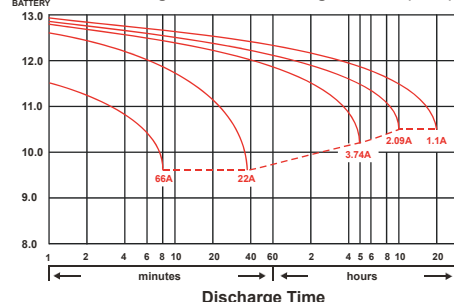


Effect of Temperature on Capacity 25°C(77°F)

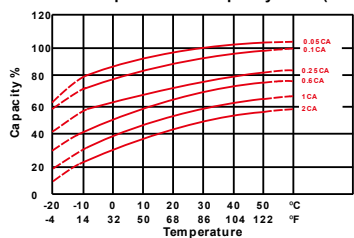


Capacity Retention Characteristic



Cycle Service Life



Influence of Temperature on Trickle(Float) Design Life



171024-1A