

Specifications

Nominal Voltage(V)

12V

Nominal Capacity

20 hour rate	(2.5A to 10.50V)	50Ah
10 hour rate	(4.75A to 10.50V)	47.5Ah
5 hour rate	(8.5A to 10.20V)	42.5Ah
1 C	(50A to 9.60V)	28.33Ah
3 C	(150A to 9.60V)	20Ah

Weight

Approx. 15.0kg(33.0Lbs.)

Internal Resistance (at 1KHz)

Approx. 5 mΩ

Maximum Discharge Current for

5 seconds: 600A

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.4 to 15.0V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current :	15A
Standby use:	
Float Charging Voltage	13.5 to 13.8V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C(5°F)	to	40°C(104°F)
Discharge	-15°C(5°F)	to	50°C(122°F)
Storage	-15°C(5°F)	to	40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	97%
3 month	92%
6 month	85%

Case Material

ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Design Life

EUROBAT(20°C): 3-5 YEARS STANDARD COMMERCIAL

Terminal

F8





Dimensions





Length (L)	199± ³ ₁ (7.83± ^{0.12} _{0.04})
Width (W)	166± ³ ₁ (6.54± ^{0.12} _{0.04})
Height (H)	171± ³ ₁ (6.73± ^{0.12} _{0.04})
Overall Height (HT)	171± ³ ₁ (6.73± ^{0.12} _{0.04})

Description of torque value of hardware for the terminals:

Recommended torque value	M6: 7 N-m (71 kgf-cm)
Maximum allowable torque value	M6: 10 N-m (102 kgf-cm)

mm(inch)

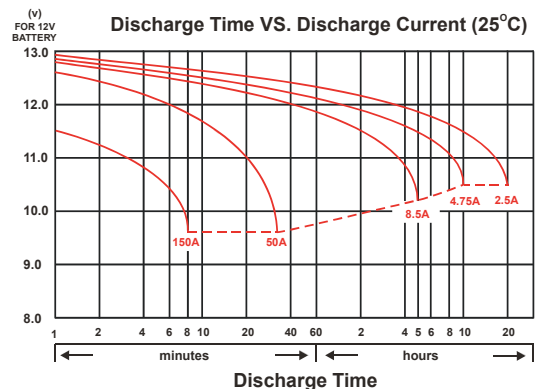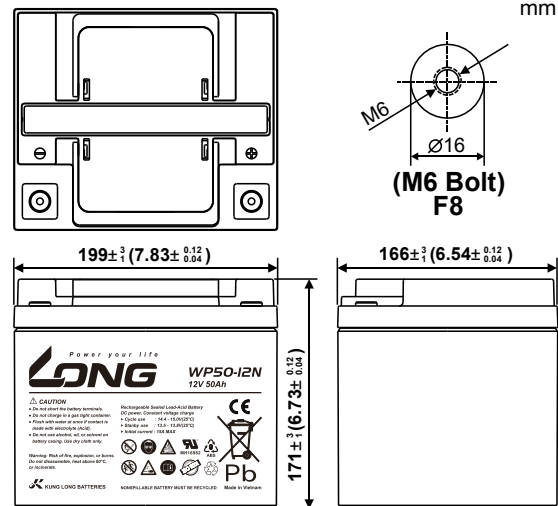

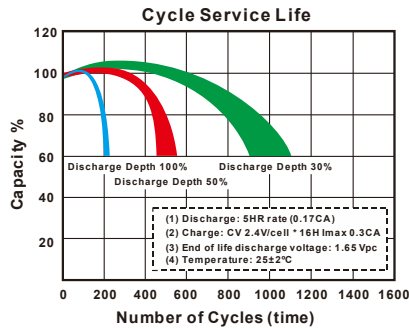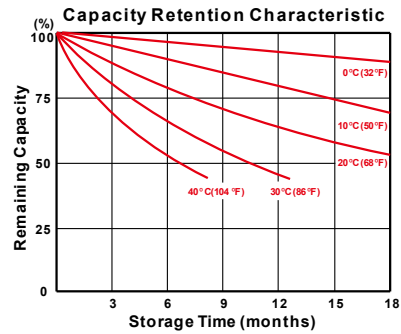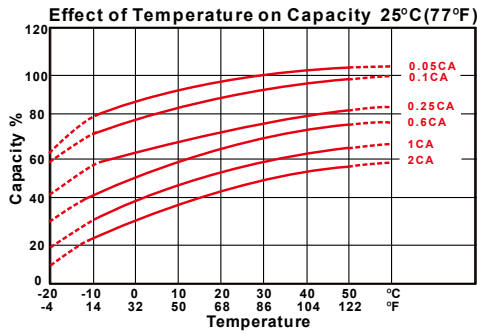

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time	min	240	288	322	345	350	356	361
5	min	171	203	223	233	237	241	246
10	min	126	146	160	167	170	172	175
15	min	78.0	89.8	97.2	100	102	103	104
30	min	53.7	56.5	58.2	59.5	60.0	60.7	61.2
60	min	29.2	32.0	33.3	34.5	34.8	35.3	35.8
120	min	20.8	22.7	23.8	24.7	25.0	25.3	25.7
180	min	17.2	18.3	19.0	19.7	19.8	20.2	20.5
240	min	15.9	16.6	17.0	17.3	17.5	17.7	17.8
300	min	8.62	9.10	9.38	9.57	9.62	9.68	9.77
600	min	4.58	4.87	5.05	5.17	5.20	5.25	5.30
1200	min							

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time	min	139	166	185	199	206	210	214
5	min	88.5	106	117	125	128	131	134
10	min	77.8	84.5	87.6	90.2	90.9	91.8	92.9
15	min	45.4	50.7	52.8	54.4	54.9	55.5	56.2
30	min	26.0	28.8	29.9	30.6	30.8	31.1	31.4
60	min	15.1	16.2	16.8	17.3	17.5	17.7	17.9
120	min	11.0	11.7	12.1	12.4	12.5	12.6	12.7
180	min	8.96	9.44	9.70	9.89	9.96	10.1	10.2
240	min	7.85	8.26	8.50	8.67	8.73	8.80	8.87
300	min	4.41	4.65	4.76	4.82	4.84	4.87	4.91
600	min	2.32	2.44	2.50	2.55	2.57	2.59	2.61
1200	min							

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

011124-1N