

⚡ Specifications

Nominal Voltage(V)

6V

Nominal Capacity

20 hour rate	(0.65A to 5.25V)	13Ah
10 hour rate	(1.235A to 5.25V)	12.35Ah
5 hour rate	(2.21A to 5.1V)	11.05Ah
1 C	(13A to 4.8V)	7.367Ah
3 C	(39A to 4.8V)	5.2Ah

Weight

Approx. 2.24kg(4.93Lbs.)

Internal Resistance (at 1KHz)

Approx. 9 mΩ

Maximum Discharge Current for

5 seconds: 156A

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	7.20 to 7.50V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current :	3.9A
Standby use:	
Float Charging Voltage	6.75 to 6.90V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C(5°F)	to	40°C(104°F)
Discharge	-15°C(5°F)	to	50°C(122°F)
Storage	-15°C(5°F)	to	40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material

ABS UL94 HB
Option: Flammability resistance of (UL94 V-0)

Design Life

3-5 Years.

Terminal

F1-F2+ (Faston Tab 187 and 250)



⚡ Dimensions

Length (L)

108±1 (4.25±0.04)

Width (W)

70±1 (2.76±0.04)


Height (H)

140±1 (5.51±0.04)


Overall Height (HT)

140±1 (5.51±0.04)


mm(inch)

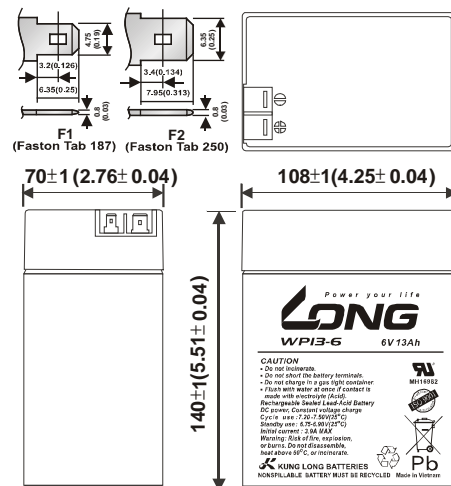


(V) FOR 6V BATTERY Discharge Time VS. Discharge Current (25°C)

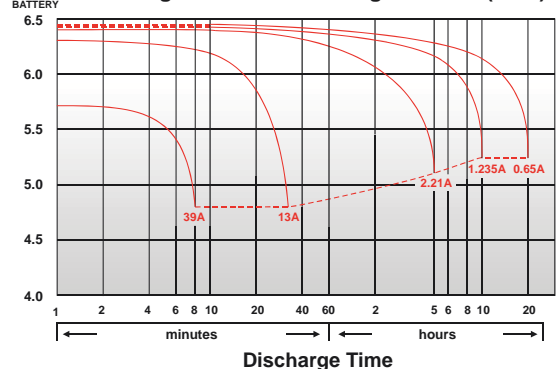


Effect of Temperature on Capacity 25°C (77°F)

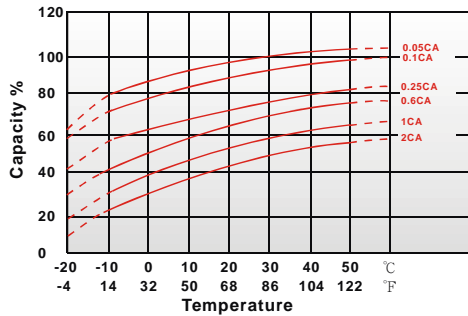


Capacity Retention Characteristic

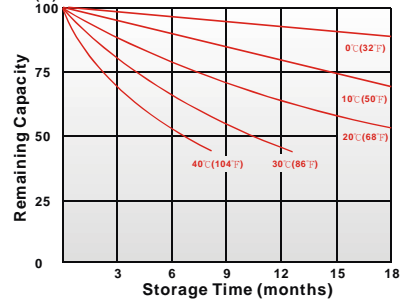

Cycle Service Life

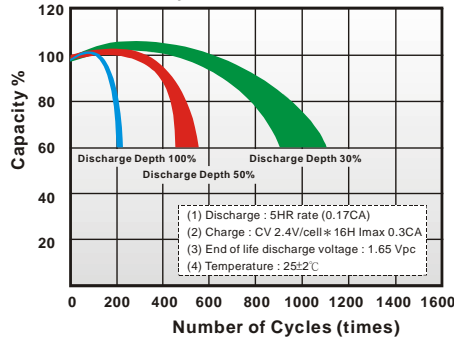

Trickle (or float) Service Life



- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	73.0	81.2	87.3	93.6	96.5	99.3	105
10	min	51.8	56.6	59.3	61.9	62.8	64.3	65.9
15	min	41.7	44.3	46.0	47.6	48.1	49.0	50.3
30	min	22.6	24.5	26.1	27.4	27.7	28.0	28.4
60	min	16.9	17.5	18.0	18.4	18.5	18.7	18.9
120	min	8.73	9.20	9.47	9.73	9.80	9.93	10.1
180	min	5.97	6.34	6.55	6.73	6.77	6.86	6.93
240	min	5.03	5.22	5.38	5.51	5.55	5.62	5.68
300	min	4.27	4.41	4.54	4.64	4.68	4.73	4.84
600	min	2.43	2.54	2.59	2.64	2.66	2.69	2.72
1200	min	1.23	1.29	1.33	1.37	1.38	1.40	1.43

- Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	40.2	44.7	48.1	51.5	53.0	54.6	57.7
10	min	27.8	30.3	31.8	33.2	33.7	34.5	35.3
15	min	21.9	23.3	24.2	25.1	25.4	25.7	26.5
30	min	12.3	13.1	13.7	14.1	14.1	14.4	14.6
60	min	8.87	9.07	9.20	9.32	9.37	9.44	9.53
120	min	4.55	4.71	4.83	4.92	4.96	5.00	5.05
180	min	3.10	3.30	3.38	3.45	3.48	3.51	3.55
240	min	2.57	2.62	2.67	2.72	2.75	2.79	2.83
300	min	2.13	2.19	2.25	2.31	2.33	2.37	2.41
600	min	1.25	1.27	1.30	1.32	1.33	1.34	1.35
1200	min	0.639	0.647	0.667	0.677	0.685	0.693	0.708

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)